


COMPONENTS FOR ELEVATORS

ELEVATOR BUCKETS



CC-MAX® PLASTIC ELEVATOR BUCKET

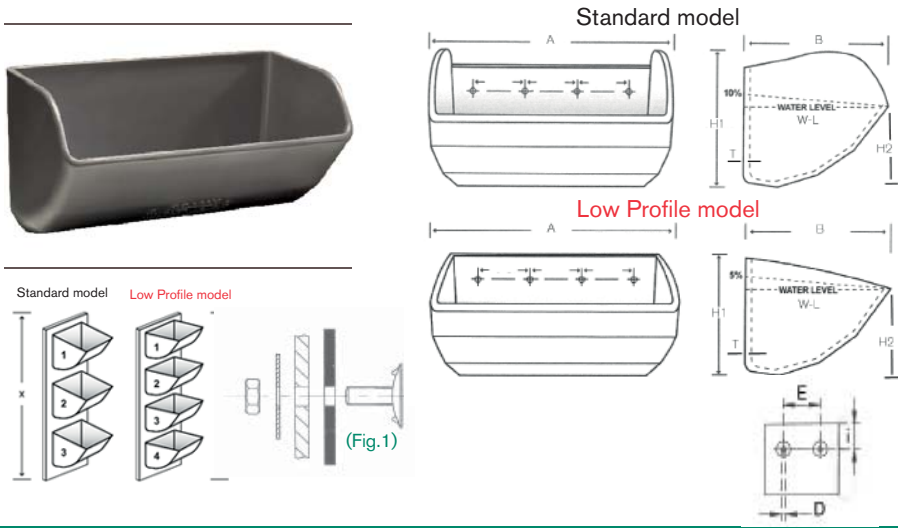

TECHNICAL SPECIFICATION - CC-MAX® PLASTIC ELEVATOR BUCKET

| Standard model | A | B | H1 | H2 | T | Capacity (W-L) | | | Capacity (W-L +10%) | Holes | D | E | I | Max. buckets per meter | Low Profile model | | | | | | |
|----------------|-----|-----|-----|-----|-----|----------------|------|-------|---------------------|-------|-----------|-----------|-----------|------------------------|-------------------|-----|------|-------|--------------------|------------------------|------|
| | | | | | | HDP | PU | Nylon | | | | | | | H1 | HDP | PU | Nylon | Capacity (W-L +5%) | Max. buckets per meter | |
| Dimensions | mm | mm | mm | mm | mm | kgs. | kgs. | kgs. | Ltr. | Ltr. | No. | mm | mm | mm | Pcs. | mm | kgs. | kgs. | kgs. | Ltr. | Pcs. |
| 5 x 4 | 140 | 114 | 108 | 70 | 5,0 | 0,24 | 0,33 | 0,28 | 0,63 | 0,69 | cust spec | cust spec | cust spec | cust spec | 6,6 | 70 | 0,22 | 0,30 | 0,25 | 0,66 | 13,1 |
| 6 x 4 | 165 | 114 | 108 | 70 | 5,0 | 0,26 | 0,36 | 0,30 | 0,74 | 0,82 | cust spec | cust spec | cust spec | cust spec | 6,6 | 70 | 0,23 | 0,32 | 0,27 | 0,78 | 13,1 |
| 7 x 4 | 191 | 114 | 108 | 70 | 5,0 | 0,29 | 0,34 | 0,29 | 0,85 | 0,94 | cust spec | cust spec | cust spec | cust spec | 6,6 | 70 | 0,26 | 0,31 | 0,26 | 0,89 | 13,1 |
| 6 x 5 | 165 | 140 | 127 | 75 | 7,0 | 0,40 | 0,54 | 0,46 | 1,16 | 1,28 | cust spec | cust spec | cust spec | cust spec | 5,6 | 95 | 0,36 | 0,49 | 0,41 | 1,22 | 9,8 |
| 7 x 5 | 191 | 140 | 127 | 75 | 7,0 | 0,45 | 0,61 | 0,52 | 1,32 | 1,46 | cust spec | cust spec | cust spec | cust spec | 5,6 | 95 | 0,41 | 0,55 | 0,47 | 1,39 | 9,8 |
| 8 x 5 | 216 | 140 | 127 | 75 | 7,0 | 0,50 | 0,68 | 0,58 | 1,49 | 1,64 | cust spec | cust spec | cust spec | cust spec | 5,6 | 95 | 0,45 | 0,61 | 0,52 | 1,57 | 9,8 |
| 8 x 6 | 205 | 168 | 152 | 100 | 7,0 | 0,64 | 0,73 | 0,86 | 2,23 | 2,45 | cust spec | cust spec | cust spec | cust spec | 4,9 | 121 | 0,58 | 0,66 | 0,77 | 2,34 | 7,9 |
| 9 x 5 | 241 | 140 | 127 | 75 | 7,0 | 0,54 | 0,72 | 0,62 | 1,65 | 1,82 | cust spec | cust spec | cust spec | cust spec | 5,6 | 95 | 0,49 | 0,65 | 0,56 | 1,73 | 9,8 |
| 9 x 6 | 243 | 168 | 152 | 100 | 7,0 | 0,69 | 0,93 | 0,79 | 2,44 | 2,69 | cust spec | cust spec | cust spec | cust spec | 4,9 | 121 | 0,62 | 0,84 | 0,71 | 2,56 | 7,9 |
| 10 x 5 | 267 | 140 | 127 | 75 | 7,0 | 0,59 | 0,80 | 0,68 | 1,87 | 2,06 | cust spec | cust spec | cust spec | cust spec | 5,6 | 95 | 0,53 | 0,72 | 0,61 | 1,96 | 9,8 |
| 10 x 6 | 268 | 168 | 152 | 100 | 7,0 | 0,74 | 1,00 | 0,86 | 2,73 | 3,01 | cust spec | cust spec | cust spec | cust spec | 4,9 | 121 | 0,67 | 0,90 | 0,77 | 2,87 | 7,9 |
| 10 x 7 | 268 | 200 | 178 | 110 | 8,0 | 1,07 | 1,44 | 1,22 | 3,87 | 4,26 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 0,96 | 1,30 | 1,10 | 4,06 | 6,6 |
| 11 x 5 | 292 | 140 | 127 | 75 | 7,0 | 0,66 | 0,89 | 0,76 | 2,09 | 2,30 | cust spec | cust spec | cust spec | cust spec | 5,6 | 95 | 0,59 | 0,80 | 0,68 | 2,20 | 9,8 |
| 11 x 6 | 294 | 168 | 152 | 100 | 7,0 | 0,78 | 1,06 | 0,90 | 2,96 | 2,96 | cust spec | cust spec | cust spec | cust spec | 4,9 | 121 | 0,70 | 0,95 | 0,81 | 3,11 | 7,9 |
| 11 x 7 | 294 | 200 | 178 | 110 | 8,0 | 1,11 | 1,49 | 1,27 | 4,06 | 4,47 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 1,00 | 1,34 | 1,14 | 4,26 | 6,6 |
| 12 x 6 | 319 | 168 | 152 | 100 | 7,0 | 0,87 | 1,17 | 1,00 | 3,29 | 3,62 | cust spec | cust spec | cust spec | cust spec | 4,9 | 121 | 0,78 | 1,05 | 0,90 | 3,45 | 7,9 |
| 12 x 7 | 319 | 200 | 178 | 110 | 8,0 | 1,19 | 1,61 | 1,37 | 4,38 | 4,82 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 1,07 | 1,45 | 1,23 | 4,60 | 6,6 |
| 12 x 8 | 319 | 225 | 203 | 120 | 9,0 | 1,47 | 1,99 | 1,70 | 6,11 | 6,72 | cust spec | cust spec | cust spec | cust spec | 3,9 | 172 | 1,32 | 1,79 | 1,53 | 6,42 | 5,6 |
| 13 x 6 | 332 | 168 | 152 | 100 | 7,0 | 0,97 | 1,31 | 1,11 | 3,52 | 3,87 | cust spec | cust spec | cust spec | cust spec | 4,9 | 121 | 0,87 | 1,18 | 1,00 | 3,70 | 7,9 |
| 13 x 7 | 344 | 200 | 178 | 110 | 8,0 | 1,26 | 1,70 | 1,45 | 4,66 | 5,13 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 1,13 | 1,53 | 1,31 | 4,89 | 6,6 |
| 13 x 8 | 344 | 225 | 203 | 120 | 9,0 | 1,59 | 2,15 | 1,83 | 6,62 | 7,28 | cust spec | cust spec | cust spec | cust spec | 3,9 | 172 | 1,43 | 1,94 | 1,65 | 6,95 | 5,6 |
| 14 x 7 | 370 | 200 | 178 | 110 | 8,0 | 1,33 | 1,80 | 1,53 | 4,97 | 5,47 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 1,20 | 1,62 | 1,38 | 5,22 | 6,6 |
| 14 x 8 | 370 | 225 | 203 | 120 | 9,0 | 1,71 | 2,30 | 1,96 | 7,13 | 7,84 | cust spec | cust spec | cust spec | cust spec | 3,9 | 172 | 1,54 | 2,07 | 1,76 | 7,49 | 5,6 |
| 15 x 7 | 395 | 200 | 178 | 110 | 9,0 | 1,41 | 1,90 | 1,62 | 5,49 | 6,04 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 1,27 | 1,71 | 1,46 | 5,77 | 6,6 |
| 16 x 7 | 421 | 200 | 178 | 110 | 9,0 | 1,49 | 2,01 | 1,71 | 5,75 | 6,33 | cust spec | cust spec | cust spec | cust spec | 4,4 | 146 | 1,34 | 1,81 | 1,54 | 6,04 | 6,6 |
| 16 x 8 | 421 | 225 | 203 | 130 | 9,6 | 1,95 | 2,64 | 2,25 | 8,45 | 9,30 | cust spec | cust spec | cust spec | cust spec | 3,9 | 172 | 1,76 | 2,38 | 2,03 | 8,87 | 5,6 |
| 18 x 8 | 471 | 225 | 203 | 130 | 9,9 | 2,17 | 2,50 | 2,93 | 9,51 | 10,46 | cust spec | cust spec | cust spec | cust spec | 3,9 | 172 | 1,95 | 2,25 | 2,64 | 9,99 | 5,6 |

- Type CC-MAX® elevator bucket has flat holes on the back of the bucket and on the inside of the bucket and needs to be fitted on the elevator belt by using a DIN15237 elevator bolt or Norway elevator bolt (metric) type STM in combination with a flat washer according to DIN9021 (Fig.1). Contact us for advice on the recommended bolt hole pattern.

- Available in polyethylene color grey (max. temp +80° C.), Polyurethane color green (max. temp +80° C.) and nylon color tan (max. temp +120° C.).
- FDA 1935/2004